

44 MW Bundled Wind Power Project in Maharashtra managed by Enercon India Limited.



Enercon (India) Ltd.

Contact Information +91-22-66924848

Project Title	44 MW Bundled Wind Power Project in Maharashtra managed by Enercon India Limited.
Version	3.0
Report ID	Mum/271/2013_489
Date of Issue	16-August-2013
Project ID	489
Monitoring Period	01-October-2012 to 30-April-2013
Prepared By	Enercon (India) Ltd.
Contact	Enercon Tower, A-9, Veera Industrial Estate, Veera Desai Road, Andheri West – 400053, Telephone +91-22-66924848, www.enerconindia.net yogesh.mehra@enerconindia.net

Table of Contents

1. PROJECT DETAILS	3
2. IMPLEMENTATION STATUS	8
3. DATA AND PARAMETERS	11
4. QUANTIFICATION OF GHG EMISSION REDUCTIONS AND REMOVALS	19
5. ADDITIONAL INFORMATION	21

1 PROJECT DETAILS

1.1 Summary Description of Project

The Project activity is located across Satara, Sangli, Nasik, and Ahmednagar District in the state of Maharashtra in India. The machines are provided, operated and maintained by Enercon (India) Ltd. It involves the installation of 55 turbines of Enercon make (E-48), each of which has a rated output of 800kW, providing a total capacity of 44 MW. The net electricity supplied by the project activity during the monitoring period is 255474.55 MWh.

The purpose of the project activity is to generate electricity using wind power resources in the region and provide reliable, renewable power to the Maharashtra state electricity grid, which is part of the NEWNE grid. The total GHG emission reductions for the entire monitoring period are 23140 tCO₂e. The project contributes to sustainability in the region by reducing pollution, creating employment opportunities, improving the livelihoods of the local people. At a larger scale, the project assists Maharashtra and ultimately India in stimulating and accelerating the commercialization of grid-connected renewable energy technologies and markets in India.

1.2 Sectoral Scope and Project Type

Sectoral scope : 1 Energy Industries (renewable -/ non renewable sources)

Project Type: I, Renewable energy project.

The project activity is not a grouped project


1.3 Project Proponent

Enercon (India) Limited

The Project is operated and managed by Enercon (India) Ltd.

Organization:	Enercon (India) Limited
Street/P.O.Box:	A-9, Veera Desai Road
Building:	Enercon Tower
City:	Mumbai
State/Region:	Maharashtra
Postcode/ZIP:	400053
Country:	India
Telephone:	+91-22-41017111
FAX:	+91-22-66921175
E-Mail:	yogesh.mehra@enerconindia.net
URL:	-
Represented by:	-
Title:	Managing Director
Salutation:	Mr
Last name:	Mehra
Middle name:	-
First name:	Yogesh
Department:	-
Mobile:	+91-98200 40301
Direct FAX:	-
Direct tel:	+91-22-22-6702 2832 extn. 7111
Personal e-mail:	-

Roles & Responsibilities

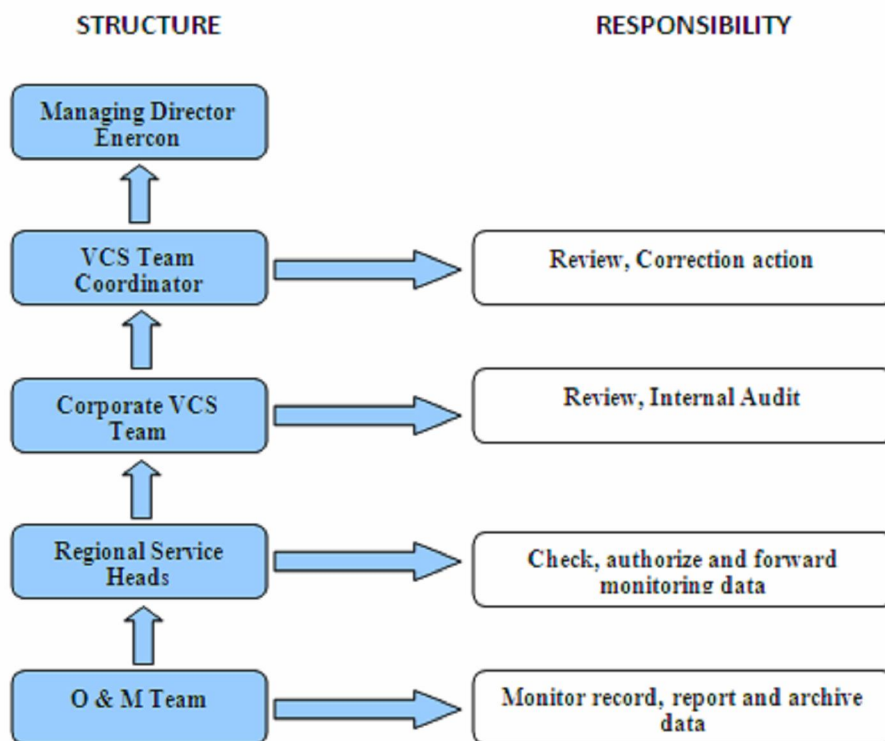

1.4 Other Entities Involved in the Project

Sr. No.	Customers Name	Address	Contact Number/email ID	Roles/Responsibilities
1	G. B. Rubber Products	S-157, M.I.D.C., Bhosari, Pune	+91-20-27120323 gbrubber@vsnl.net	Project Investor
2	Atlas Tours & Travels Pvt. Ltd	"Haji Mahal", 53 Mohammed Ali Road, Mumbai	+91-22-6141-1000 info@atlastravels.com	Project Investor
3	Shah Lulla Estate Developers	'Poshish', 1 st Floor, Lale Plot, Madhavnagar Road, Sangli	+91-233-2377585 poshish@pn3.vsnl.net.in	Project Investor
4	Liberty Oil Mills Ltd.	Amerchand Mansion, 'D'	+91-22-66381000	Project Investor

		Wind: 16, Madame Cama Road, Colaba, Mumbai	admin@libertyoilmills.com	
4	Liberty Oil Mills Ltd.	Amerchand Mansion, 'D' Wind: 16, Madame Cama Road, Colaba, Mumbai	+91-22-66381000 admin@libertyoilmills.com	Project Investor
5	Paceman Sales Promotion P. Ltd.	14, Netaji Subhas Road, 4 th Floor, Kolkata.	+91-33-2231-6142 puti2961@dataone.in	Project Investor
6	Delta Enterprises	Clover Centre, 7 Moledina Road, Pune	+91-20-26132000	Project Investor
7	Shreem Capacitors Pvt. Ltd.	P.B. No. 43, Industrial Estate, Plot No. 43/46, Jaisingpur	+91-2322-221021 kpr_shreem@sancharnet.in	Project Investor
8	Kishor Food Products P. Ltd	"Matruchhya" Post Box No. 23, Dondaicha	+91-20-25630872	Project Investor
9	Mahanagar Developers	San Mahu Complex, Bund Garden Road, Pune.	+92-20-2612-4265 sales@goelgangaddevelopers.com	Project Investor
9	Mahanagar Developers	San Mahu Complex, Bund Garden Road, Pune.	+92-20-2612-4265 sales@goelgangaddevelopers.com	Project Investor
10	Mr. J. P. Patel	39/D, Gultekdi, J.N. Marg, Pune	+91-20 2644 4625	Project Investor
11	Mr. C. P. Patel	39/D, Gultekdi, J.N. Marg, Pune	+91-20 2644 4625	Project Investor
12	Mr. V. V. Patel	39/D, Gultekdi, J.N. Marg, Pune	+91-20 2644 4625	Project Investor
13	Mr. J. V. Patel	39/D, Gultekdi, J.N. Marg, Pune	+91-20 2644 4625	Project Investor
14	Mr. S. V. Patel	39/D, Gultekdi, J.N.	+91-20 2644 4625	Project Investor

		Marg, Pune		
15	Mr. V. L. Patel	39/D, Gultekdi,J.N. Marg, Pune	+91-20 2644 4625	Project Investor
16	Laxmi Narayan Best Chiwda	374, Bhavani Peth, Pune	+91-20-26454561	Project Investor
17	Om Shanti Wind Farms P. Ltd	12-1-58, Gunj Road, Raichur	+91-8532-235202 kamal@askgroup.b iz	Project Investor
18	New Sahyadri Industries Ltd.	"Swastik House", 39/D, Gultekdi,J.N. Marg, Pune	+91-20-2645-8888 swastikroofing@sil world.in	Project Investor
19	Mr. P. L. Patel	39/D, Gultekdi,J.N. Marg, Pune	+91-20 2644 4625	Project Investor
20	Elpro International	17 th Floor, Nirmal, Nariman Point Mumbai	+91-22-2202-3075	Project Investor
21	Prachar Energy	105,B-Wing, Samkeet Apartments, Sant Janabai Marg, Off. Hanuman Road, Vile Parle (E), Mumbai	+91-22-261-08750 deepak@prachar.in	Project Investor
22	D.J. Malpani	Plot No. 36, Somwar Peth, Pune	+91-20-2612 5060	Project Investor
23	International Conveyors Ltd.	10, Middleton Row, Post Box No. 9282, Kolkata	+91-33-2229-6033 icltd@vsnl.net	Project Investor
24	Metalfab Hightech Private Limited	E21-25 & 33B/2,MIDC, Industrial Area, Hingna Road, Nagpur	+91-7104-234240 mfhpl@hotmail.co m	Project Investor
25	Gargi Construction Co. Pvt. Ltd.	Clover Centre, 7 Moledina Road, Pune	+91-20-26132000	Project Investor
26	Mohite & Mohite	'Mohite House', 240/B, Gen. Tihorat Marg, Tarabai park, Kolhapur	+91-231-2669991 mohicon@sanchar net.in	Project Investor

27	Indiana Engineering Works (Bombay) P. Ltd.	Indiana House, Off. M.V. road, Marol Naka, andheri (East), Mumbai	+91(22)-2850 4743, 2850 5611	Project Investor
28	Welpack Industries Ltd.	87, Government Estate, Ganesh Nagar, Nr. Gaurda Petrol Pump, Charkop, Kandivale (W), Mumbai	+91-22-2867-8111 info@welpackind.com	Project Investor
29	Sunilkumar Ramanlal Shah	4920941, "Jeevan Jyoti", 151, Bhavani Path, Palace Street, Satara.	+91-9823016132	Project Investor

1.5 Project Start Date

07th February 2006

1.6 Project Crediting Period

The crediting period for the project activity is considered from April 1, 2006 to March 31, 2016, for 10 years.

1.7 Project Location

The Project is spread across villages in Kadvekhurd, Varekarwadi, Bhambarwadi & Panchpatta, in Satara, Sangli, Nasik & Ahmednagar district in the state of Maharashtra. The location of the units is on the micro-siting data to get optimum performance. The latitudinal & longitudinal of individual machines are as given in the following table:

Sr. No.	Customers Name	Machine Capacity	Site	Taluka	District	Latitude	Longitude
		(MW)					
1	G. B. Rubber Products	1.6	Kadvekhurd	Patan	Satara	N 17°33'15" to 17°33'56" E 73°55'28" to 73°56'51"	
2	Atlas Tours & Travels Pvt. Ltd	0.8	Kadvekhurd	Patan	Satara	N 17°33'15" to 17°33'56" E 73°55'28" to 73°56'51"	

3	Shah Lulla Estate Developers	0.8	Kadvekhurd	Patan	Satara	N 17°33'15" to 17°33'56" E 73°55'28" to 73°56'51"	
4	Liberty Oil Mills Ltd.	2.4	Kadvekhurd	Patan	Satara	N 17°33'15" to 17°33'56" E 73°55'28" to 73°56'51"	
4	Liberty Oil Mills Ltd.	1.6	Varekarwadi	Patan	Satara	N 17°11'47.6" 17°11'51.2"	E 73°59'12.7" 73°59'13.5"
5	Paceman Sales Promotion P. Ltd.	0.8	Bhambarwadi	Shirla	Sangli	N 17°8'36.5"	E 73°55'14.3"
6	Delta Enterprises	2.4	Bhambarwadi	Shirla	Sangli	N 17°7'11.3" 17°8'35.6" 17°8'28.5"	E 73°56'5.7" 73°55'2.8" 73°55'21.7"
7	Shreem Capacitors Pvt. Ltd.	3.2	Bhambarwadi	Shirla	Sangli	N 17°8'52.1" 17°8'58.2" 17°9'2.8" 17°9'34.8"	E 73°55'10.1" 73°55'6" 73°55'5.4" 73°55'6.1"
8	Kishor Food Products P. Ltd	0.8	Bhambarwadi	Shirla	Sangli	N 17°8'53.2"	E 73°54'57.7"
9	Mahanagar Developers	7.2	Bhambarwadi	Shirla	Sangli	N 17°9'7.6" 17°9'14.7" 17°9'19.1" 17°9'24.6"	E 73°55'5.8" 73°55'2.5" 73°55'3.6" 73°55'6"

						17°9'28.2"	73°55'6.7"
						17°9'14.5"	73°55'18.1"
						17°9'10.8"	73°55'36.6"
						17°9'10.9"	73°55'3.5"
						17°8'10.9"	73°56'0.5"
9	Mahanagar Developers	0.8	Panchpatta	Sinnar	Nasik	N 19°39'12.8"	E 73°48'41.4"
10	Mr. J. P. Patel	0.8	Panchpatta	Sinnar	Nasik	N 19°45'53.4"	E 73°50'32.8"
11	Mr. C. P. Patel	0.8	Panchpatta	Sinnar	Nasik	N 19°45'17.1"	E 73°50'31.4"
12	Mr. V. V. Patel	0.8	Panchpatta	Sinnar	Nasik	N 19°44'58"	E 73°50'13.1"
13	Mr. J. V. Patel	0.8	Panchpatta	Sinnar	Nasik	N 19°45'12.7"	E 73°50'29.2"
14	Mr. S. V. Patel	0.8	Panchpatta	Sinnar	Nasik	N 19°45'46.9"	E 73°50'34.1"
15	Mr. V. L. Patel	0.8	Panchpatta	Sinnar	Nasik	N 19°44'33.5"	E 73°50'29.2"
16	Laxmi Narayan Best Chiwda	0.8	Panchpatta	Sinnar	Nasik	N 19°45'2.9"	E 73°50'12.6"
17	Om Shanti Wind Farms P. Ltd	0.8	Aundhewadi	Sinnar	Nasik	N 19°45'7.7"	E 73°50'12.8"
18	New Sahyadri Industries Ltd.	1.6	Panchpatta	Akole	Ahmednagar	N 19°44'24.3"	E 73°50'40.8"
						19°44'28.2"	73°50'35.7"

19	Mr. P. L. Patel	0.8	Panchpatta	Akole	Ahmednagar	N 19°41'7.2"	E 73°48'48.2"
20	Elpro International	0.8	Panchpatta	Akole	Ahmednagar	N 19°41'41.8"	E 73°48'53.3"
21	Prachar Energy	1.6	Panchpatta	Akole	Ahmednagar	N 19°39'17.8"	E 73°48'42.7"
						19°39'22.7"	73°48'47.5"
22	<u>D.J. Malpani[1]</u>	1.6	Panchpatta	Akole	Ahmednagar	N 19°41'16.6"	E 73°48'53"
						19°41'20.6"	73°48'55.6"
23	International Conveyors Ltd.	0.8	Panchpatta	Akole	Ahmednagar	N 19°41'37"	E 73°48'54.3"
24	Metalfab Hightech Private Limited	0.8	Panchpatta	Akole	Ahmednagar	N 19°41'11.9"	E 73°48'51.6"
25	Gargi Construction Co. Pvt. Ltd.	1.6	Panchpatta	Akole	Ahmednagar	N 19°41'26.1"	E 73°48'55.1"
						19°41'31.1"	73°48'54.5"
26	Mohite & Mohite	2.4	Panchpatta	Akole	Ahmednagar	N 19°42'15.6"	E 73°49'6.4"
						19°42'20.5"	73°49'15.9"
						19°42'25.6"	73°49'15.3"
27	Indiana Engineering Works (Bombay) P. Ltd.	1.6	Panchpatta	Akole	Ahmednagar	N 19°39'27.5"	E 73°48'49"
						19°39'32.4"	73°48'49.8"

28	Welpack Industries Ltd.	0.8	Panchpatta	Akole	Ahmednagar	N 19°39'7.9"	E 73°48'37"
29	Sunilkumar Ramanlal Shah	0.8	Panchpatta	Akole	Ahmednagar	N 19°44'38.6"	E 73°50'22.5"

1.8 Title and Reference of Methodology

The project under consideration has been developed using UNFCCC CDM program approved methodology for large-scale CDM Project activity ACM 0002, Version 10.0 (<http://cdm.unfccc.int/UserManagement/FileStorage/NF9EDA0V5K382HW0JR14GS7XYQUMCP>) The title of this baseline and monitoring methodology is Consolidated baseline and monitoring methodology for grid-connected electricity generation from renewable sources".

2 IMPLEMENTATION STATUS

2.1 Implementation Status of the Project Activity

The first machine under the project activity was commissioned on 7th February 2006 and last machine under the project activity was commissioned on 10th December 2008. The project activity consists of 55 machines (800 kWh) of Enercon make E-48. The commissioning date for all the machines included in the project activity is given in the table below.

Serial No	Customer Name	Individual Capacity	Loc No.	Capacity	Date of Commissioning
1	G. B. Rubber Products	0.8	1	1.6	14-Feb-06
2	G. B. Rubber Products	0.8	2		14-Feb-06
3	Shah Lulla Estate Developers	0.8	4	0.8	14-Feb-06
4	Liberty Oil Mills Ltd.	0.8	6	2.4	7-Feb-06
5	Liberty Oil Mills Ltd.	0.8	7		7-Feb-06
6	Liberty Oil Mills Ltd.	0.8	8		7-Feb-06
7	Liberty Oil Mills Ltd.	0.8	1	1.6	8-Feb-06
8	Liberty Oil Mills Ltd.	0.8	2		8-Feb-06
9	Paceman Sales Promotion P. Ltd.	0.8	36	0.8	22-Mar-06
10	Delta Enterprises	0.8	37	1.6	22-Mar-06
11	Delta Enterprises	0.8	38		15-Jun-06
12	Delta Enterprises	0.8	19	0.8	15-Jun-06
13	Mahanagar Developers	0.8	53	4.8	5-Jan-07
14	Mahanagar Developers	0.8	54		6-Mar-07
15	Mahanagar Developers	0.8	55		5-Jan-07
16	Mahanagar Developers	0.8	56		5-Jan-07
17	Mahanagar Developers	0.8	57		5-Jan-07

Serial No	Customer Name	Individual Capacity	Loc No.	Capacity	Date of Commissioning
18	Mahanagar Developers	0.8	61		5-Jan-07
19	Mahanagar Developers	0.8	62		6-Mar-07
20	Mahanagar Developers	0.8	63	2.4	5-Jan-07
21	Mahanagar Developers	0.8	60		6-Mar-07
22	Mahanagar Developers	0.8	30	0.8	28-Feb-07
23	Kishor Food Products P. Ltd.	0.8	47	0.8	10-Dec-08
24	Mr. J. P. Patel	0.8	95	0.8	29-Mar-07
25	Mr. C. P. Patel	0.8	84	0.8	31-Mar-07
26	Mr. V. V. Patel	0.8	80	0.8	31-Mar-07
27	Mr. J. V. Patel	0.8	83	0.8	29-Mar-07
28	Mr. S. V. Patel	0.8	94	0.8	29-Mar-07
29	Mr. V. L. Patel	0.8	76	0.8	29-Mar-07
30	Laxmi Narayan Best Chiwda	0.8	81	0.8	29-Mar-07
31	New Sahyadri Industries Ltd.	0.8	74	1.6	27-Jan-07
32	New Sahyadri Industries Ltd.	0.8	75		27-Jan-07
33	Mr. P. L. Patel	0.8	45	0.8	6-Feb-07
34	Elpro International	0.8	52	0.8	30-Dec-06
35	Prachar Energy	0.8	31	1.6	3-Mar-07
36	Prachar Energy	0.8	32		3-Mar-07
37	D. J. Malpani	0.8	47	1.6	30-Dec-06
38	D.J. Malpani	0.8	48		30-Dec-06
39	International Conveyors Ltd.	0.8	51	0.8	30-Dec-06
40	Shreem Capacitors Pvt. Ltd.	0.8	50	3.2	10-Dec-08
41	Shreem Capacitors Pvt. Ltd.	0.8	51		10-Dec-08
42	Shreem Capacitors Pvt. Ltd.	0.8	52		10-Dec-08
43	Shreem Capacitors Pvt. Ltd.	0.8	58		10-Dec-08
44	Metalfab Hightech Private Limited	0.8	46	0.8	6-Feb-07
45	Atlas Tours & Travels Pvt. Ltd.	0.8	5	0.8	7-Feb-06
46	Om Shanti Wind Farms P. Ltd.	0.8	82	0.8	31-Mar-07
47	Gargi Construction Co. Pvt. Ltd.	0.8	49	1.6	30-Dec-06
48	Gargi Construction Co. Pvt. Ltd.	0.8	50		30-Dec-06
49	Mohite & Mohite	0.8	59	2.4	30-Dec-06
50	Mohite & Mohite	0.8	60		30-Dec-06
51	Mohite & Mohite	0.8	61		30-Dec-06
52	Indiana Engineering Works (Bombay) P. Ltd.	0.8	33	1.6	3-Mar-07
53	Indiana Engineering Works (Bombay) P. Ltd.	0.8	34		3-Mar-07
54	Welpack Industries Ltd.	0.8	29	0.8	28-Feb-07

Serial No	Customer Name	Individual Capacity	Loc No.	Capacity	Date of Commissioning
55	Sunilkumar Ramanlal Shah	0.8	77	0.8	30-Mar-08

There have not been any special events comprising of major overhauls and downtime of project activity during the said monitoring period; thus there has not been any change in the operation of project activity during the monitoring period. Also, there have not been any events that may impact the GHG emission reductions and monitoring in current monitoring period.

Operation details of WTGs are as follows:

State	MAHARASHTRA		Monthly Performance Report						Date:01/10/2012-30/04/2013		
	Generation		Lack Of Wind	Down Time		Grid		Total	Machine Availability(%)	Capacity Factor(%)	Grid Availability(%)
	Wec No.	KWh		Hrs	Fault	Shutdown	Fault				
Site: VAREKARWADI, MAHARASHTRA			LIBERTY OIL MILLS LTD.								
LOMLVA-01	470819	4248:00:00	766:50:00	17:23	25:30:00	60:44:00	11:03	877:00:00	99.15	11.62	98.58
LOMLVA-02	461708	4271:00:00	776:21:00	8:42	23:57	60:44:00	11:03	877:00:00	99.36	11.34	98.59
Site: TIRADE, MAHARASHTRA			SAHYADRI INDUSTRIES LTD						Total WEC : 2		
SILPP-01 (74)	582611	4172:00:00	751:09:00	9:01	30:56:00	68:25:00	11:57	899:00:00	99.18	14.71	98.36
SILPP-02 (75)	402680	3480:00:00	743:46:00	690:17:00	31:07:00	65:45:00	11:57	1577:00:00	85.27	10.28	98.41
Site: KOKANWADI, MAHARASHTRA			MR. P. L. PATEL						Total WEC : 1		
PLPPP-01 (45)	531541	3906:00:00	985:04:00	2:42	40:52:00	96:44:00	20:50	1171:00:00	99.11	13.5	97.61
Site: KOKANWADI, MAHARASHTRA			MOHITE AND MOHITE						Total WEC : 3		
MAMPP-01 (59)	551981	3822:00:00	1040:12:00	8:02	56:56:00	96:44:00	61:16:00	1283:00:00	98.69	13.96	96.8
MAMPP-02 (60)	480838	3797:00:00	1081:56:00	21:12	43:31:00	96:44:00	61:16:00	1329:00:00	98.7	12.1	96.82
MAMPP-03 (61)	510880	3811:00:00	1038:06:00	37:19:00	34:48:00	96:44:00	61:16:00	1294:00:00	98.54	12.92	96.8
Site: KOKANWADI, MAHARASHTRA			METALFAB HIGHTECH PRIVATE LIMITED						Total WEC : 1		
MHPLPP-01 (46)	512388	3660:00:00	1018:13:00	21:51	37:19:00	96:44:00	20:50	1417:00:00	98.8	13.02	97.61
Site: KOKANWADI, MAHARASHTRA			INTERNATIONAL CONVEYORS LIMITED						Total WEC : 1		
ICLPP-01 (51)	540658	3686:00:00	1145:38:00	53:29:00	40:29:00	96:44:00	61:16:00	1417:00:00	98.11	13.6	96.82
Site: KOKANWADI, MAHARASHTRA			GARGI CONSTRUCTION CO. PVT. LTD						Total WEC : 2		
GCPPP-01 (49)	580848	3779:00:00	1065:11:00	43:55:00	36:52:00	96:44:00	20:50	1288:00:00	98.36	14.75	97.61
GCPPP-02 (50)	557716	3793:00:00	1050:20:00	9:48	54:35:00	96:44:00	61:16:00	1299:00:00	98.7	14.1	96.8
Site: KOKANWADI, MAHARASHTRA			ELPRO INTERNATIONAL LTD						Total WEC : 1		
ELPP-01	548987	3771:00:00	1067:55:00	5:48	35:03:00	96:44:00	61:16:00	1341:00:00	99.18	13.81	96.82
Site: KADVEKHURD, MAHARASHTRA			SHAH LULLA ESTATE DEVELOPERS						Total WEC : 1		
SLEDKK-01 ()	415528	4185:00:00	817:59:00	4:15	30:40:00	37:02:00	31:50:00	919:00:00	99.31	10.21	98.65
Site: KADVEKHURD, MAHARASHTRA			LIBERTY OIL MILLS LTD.						Total WEC : 3		
LOMLKK-01 ()	321107	3987:00:00	964:36:00	44:05:00	39:03:00	37:02:00	31:53:00	1115:00:00	98.37	7.89	98.65
LOMLKK-02 ()	394510	4066:00:00	917:24:00	22:49	31:00:00	37:02:00	31:49:00	1036:00:00	98.94	9.69	98.65
LOMLKK-03 ()	356066	4072:00:00	930:51:00	3:55	26:26:00	37:02:00	34:07:00	1030:00:00	99.4	8.76	98.6
Site: KADVEKHURD, MAHARASHTRA			G. B. RUBBER PRODUCTS						Total WEC : 2		
GBRPPK-01 ()	381558	4209:00:00	782:16:00	12:00	28:05:00	37:02:00	39:42:00	896:00:00	99.21	9.37	98.49
GBRPPK-02 ()	374605	4185:00:00	799:12:00	23:48	30:13:00	37:02:00	31:32:00	919:00:00	98.94	9.2	98.65
Site: KADVEKHURD, MAHARASHTRA			ATLAS TOURS AND TRAVELS PVT. LTD.						Total WEC : 1		
ATPLKK-01 (1)	346935	4085:00:00	917:34:00	3:22	31:32:00	37:02:00	31:51:00	1019:00:00	99.31	8.52	98.65
Site: JAYNEWADI, MAHARASHTRA			WELPACK INDUSTRIES LTD.						Total WEC : 1		
WLPP-01 (29)	692790	4175:00:00	773:14:00	0	40:59:00	72:05:00	4:00	925:00:00	99.16	17.52	98.45
Site: JAYNEWADI, MAHARASHTRA			PRACHAR ENERGY						Total WEC : 2		
PEPP-01 (31)	696007	4240:00:00	724:37:00	12:49	26:37:00	72:05:00	4:00	863:00:00	99.19	17.61	98.45
PEPP-02 (32)	650332	4157:00:00	592:40:00	104:48:00	122:40:00	72:05:00	4:00	944:00:00	95.35	16.36	98.45
Site: JAYNEWADI, MAHARASHTRA			MAHANAGAR DEVELOPERS						Total WEC : 1		
MDPP-01 (30)	788578	4317:00:00	633:22:00	19:41	35:45:00	72:05:00	4:00	797:00:00	98.87	19.35	98.45
Site: JAYNEWADI, MAHARASHTRA			INDIANA ENGINEERING WORKS (BOMBAY) PVT. LTD						Total WEC : 2		
IGPLPP-01 (33)	624388	4153:00:00	651:25:00	121:46:00	38:54:00	72:05:00	4:00	962:00:00	96.72	15.72	98.45
IGPLPP-02 (34)	666087	4365:00:00	597:07:00	6:31	33:17:00	72:05:00	6:40	749:00:00	99.19	16.82	98.39
Site: CHAVANESHWAR, MAHARASHTRA			LIBERTY OIL MILLS LTD.						Total WEC : 3		
LOMLCV-11 (73)	455523	3964:00:00	737:37:00	131:26:00	31:47:00	43:51:00	17:28	1137:00:00	96.79	11.19	98.79
LOMLCV-12 (74)	555135	4290:00:00	552:28:00	2:00	26:10:00	43:51:00	17:28	817:00:00	99.45	13.64	98.79
LOMLCV-13 (75)	459718	4124:00:00	666:09:00	62:52:00	23:37	43:51:00	17:28	984:00:00	98.3	11.29	98.79
Total	1470376	12378:00	1956:14:00	196:18:00	81:34:00	131:33:00	52:24:00	2938:00:00	98.18	12.04	98.79
Site: BHAMBARWADI, MAHARASHTRA			SHREEM CAPACITORS PVT LTD						Total WEC : 4		
SCPLBH-01 (50)	472233	4508:00:00	550:31:00	14:25	26:18:00	28:08:00	4:47	623:00:00	99.2	11.6	99.35
SCPLBH-02 (51)	411758	4328:00:00	721:16:00	25:51:00	22:48	28:08:00	4:47	802:00:00	99.04	10.12	99.35
SCPLBH-03 (52)	406346	4294:00:00	740:40:00	46:10:00	18:05	28:08:00	4:47	837:00:00	98.74	9.98	99.35
SCPLBH-04 (58)	348102	4077:00:00	952:52:00	31:10:00	34:03:00	28:08:00	4:47	1051:00:00	98.72	8.55	99.35
Site: BHAMBARWADI, MAHARASHTRA			PACEMAN SALES PROMOTION P. LTD						Total WEC : 1		
PSPPLBH-01 ()	482049	4042:00:00	723:59:00	50:05:00	23:41	70:06:00	64:27:00	1057:00:00	98.55	11.84	97.36
Site: BHAMBARWADI, MAHARASHTRA			MAHANAGAR DEVELOPERS						Total WEC : 9		
MDBH-01 (57)	364468	4079:00:00	963:34:00	6:11	46:40:00	28:08:00	4:47	1049:00:00	98.96	8.95	99.35
MDBH-02 (54)	374811	4191:00:00	882:47:00	0	22:38	28:08:00	4:47	938:00:00	99.56	9.21	99.35
MDBH-03 (55)	349976	4146:00:00	875:50:00	0	74:40:00	28:08:00	4:47	982:00:00	98.53	8.6	99.35
MDBH-04 (56)	330392	4056:00:00	916:17:00	29:59:00	105:38:00	28:08:00	4:47	1079:00:00	97.33	8.12	99.35
MDBH-05 (62)	345557	4196:00:00	865:57:00	14:10	20:48	28:08:00	4:47	933:00:00	99.31	8.49	99.35
MDBH-06 (53)	359525	4127:00:00	915:16:00	47:04:00	6:35	28:08:00	4:47	1001:00:00	98.95	8.83	99.35
MDBH-07 (61)	415325	4226:00:00	819:14:00	22:41	27:30:00	28:08:00	4:47	902:00:00	99.01	10.2	99.35
MDBH-08 (60)	348653	3923:00:00	1074:02:00	72:56:00	24:27:00	28:08:00	4:47	1204:00:00	98.09	8.57	99.35
MDBH-09 (63)	448583	4269:00:00	695:40:00	9:48	21:46	70:06:00	64:27:00	861:00:00	99.38	11.02	97.36
Site: BHAMBARWADI, MAHARASHTRA			KISHOR FOOD PRODUCTS PVT. LTD.						Total WEC : 1		
KFPLBH-01 (47)	462763	4477:00:00	589:11:00	12:34	21:22	28:08:00	4:47	655:00:00	99.33	11.37	99.35
Site: BHAMBARWADI, MAHARASHTRA			DELTA ENTERPRISES						Total WEC : 3		
DEBH-01 (37)	506820	4146:00:00	639:37:00	47:15:00	20:45	70:06:00	64:27:00	958:00:00	98.66	12.45	97.36
DEBH-02 (38)	375245	3425:00:00	593:16:00	876:03:00	72:41:00	70:06:00	64:27:00	1675:00:00	81.35	9.22	97.36
DEBH-03 (19)	345084	3841:00:00	1037:09:00	29:11:00	69:27:00	70:06:00	60:54:00	1265:00:00	98.06	8.48	97.43
Site: AUNDHEWADI, MAHARASHTRA			SUNILKUMAR RAMANLAL SHAH						Total WEC : 1		
SRSAPW-01 (77)	576353	4150:00:00	729:13:00	9:11	20:33	124:38:00	11:12	923:00:00	99.39	14.59	97.23
Site: AUNDHEWADI, MAHARASHTRA			OM SHANTI WIND FARMS PVT. LTD						Total WEC : 1		
OSWPLAW-01 (9)	544056	3873:00:00	953:57:00	46:39:00	29:58:00	124:38:00	11:12	1195:00:00	98.44	13.75	97.23
Site: AUNDHEWADI, MAHARASHTRA			MR. V. V. PATEL						Total WEC : 1		
VVPAW-01 (80)	624886	3953:00:00	874:09:00	24:14:00	34:57:00	124:38:00	19:20	1104:00:00	98.79	15.72	97.06
Site: AUNDHEWADI, MAHARASHTRA			MR. V. L. PATEL						Total WEC : 1		
VVPAW-01 (76)	478181	3907:00:00	929:20:00	31:34:00	32:18:00	124:38:00	11:12	1157:00:00	98.7	12.21	97.23
Site: AUNDHEWADI, MAHARASHTRA			MR. S. V. PATEL						Total WEC : 1		
SVPAW-01 (94)	511232	3721:00:00	1109:15:00	35:59:00	18:03	124:38:00	8:11	1323:00:00	98.9	13.01	97.29
Site: AUNDHEWADI, MAHARASHTRA			MR. J. V. PATEL						Total WEC : 1		
JVPAW-01 (83)	528024	3340:00:00	755:27:00	731:24:00	27:57:00	124:38:00	11:12	1711:00:00	84.49	13.3	97.23
Site: AUNDHEWADI, MAHARASHTRA			MR. J. P. PATEL						Total WEC : 1		
JPPAW-01 (95)	445753	3654:00:00	1181:31:00	20:19	25:16:00	124:38:00	8:11	1388:00:00	99.07	11.38	97.29
Site: AUNDHEWADI, MAHARASHTRA			MR. C. P. PATEL						Total WEC : 1		
CPPAW-01 (84)	596400	3912:00:00	906:15:00	40:13:00	40:00:00	124:38:00	10:25	1148:00:00	98.36	15.07	97.24
Site: AUNDHEWADI, MAHARASHTRA			LAXMI NARAYAN BEST CHWDA						Total WEC : 1		
LNBCAW-01 (81)	605123	3948:00:00	826:18:00	34:24:00	32:50:00	124:38:00	11:12	1105:00:00	98.63	15.29	97.23

2.2 Project Description Deviations

No deviation in the project description occurred in the current monitoring period.

2.3 Grouped Project

N/A.

3 DATA AND PARAMETERS

3.1 Data and Parameters Available at Validation

Data Unit / Parameter:	EF _{grid, y}
Data unit:	tCO ₂ / MWh
Description:	Combined margin emission factor of NEWNE grid
Source of data:	Calculated from operating and built margin, using 75%-25% weights used (Source: CEA database Version 4 October 2008 http://www.cea.nic.in/reports/planning/cdm_co2/cdm_co2.htm)
Value applied:	0.90589
Purpose of the data:	To calculate Baseline Emissions.
Any comment:	This value is calculated on ex-ante basis and will remain fixed for the entire crediting period.

Data Unit / Parameter:	EF _{OM, y}
Data unit:	tCO ₂ / MWh
Description:	Operating margin emission factor of NEWNE Grid
Source of data:	Calculated from CEA database (Source: CEA database Version 4 October 2008 http://www.cea.nic.in/reports/planning/cdm_co2/cdm_co2.htm)
Value applied:	1.00862
Purpose of the data:	To calculate Baseline Emissions.
Any comment:	This value is calculated on ex-ante basis and will remain fixed for the entire crediting period.

Data Unit / Parameter:	EF _{BM, y}
Data unit:	tCO ₂ / MWh
Description:	Build margin emission factor of NEWNE grid
Source of data:	Calculated from CEA database (Source: CEA database Version 4 October 2008 http://www.cea.nic.in/reports/planning/cdm_co2/cdm_co2.htm)

Value applied:	0.59771
Purpose of the data:	To calculate Baseline Emissions.
Any comment:	This value is calculated on ex-ante basis and will remain fixed for the entire crediting period.

3.2 Data and Parameters Monitored

Data Unit / Parameter:	EG _{Export,y}
Data unit:	MWh (Mega-watt hour)
Description:	Electricity exported to the grid by the project activity in year y
Source of data:	Monthly certificates issued by MSEDCL
Description of measurement methods and procedures to be applied:	The Energy generated at the wind farm will be metered and measured by MSEDCL on monthly basis at the sending end substation of the Wind Farm. The monitoring of „electricity exported to the grid“ would be as per the details provided in PPA.
Frequency of monitoring/recording:	Continuous monitoring and Monthly recording
Value monitored:	255851.586
Monitoring equipment:	The Energy Meters of accuracy class 0.2s has been used to measure the electricity exported (at substation) and same is being apportioned by MSEDCL to calculate electricity exported by the project activity. Refer section 3.3 for more details.
QA/QC procedures to be applied:	Every month these meter readings are jointly recorded by MSEDCL representative and plant personnel. The meters at the sub station are the two-way meters and are in the custody of MSEDCL. Since the readings are taken at the point of supply of power to the grid, the transmission and distribution losses and the minimum reactive power consumption has already been taken into account. Refer section 3.3 for more details.
Calculation method:	Described in Section 3.3
Any comment:	Not Applicable

Data Unit / Parameter:	EG _{Import,y}
Data unit:	MWh (Mega-watt hour)
Description:	Electricity imported from the grid
Source of data:	Monthly certificates issued by MSEDCL

Description of measurement methods and procedures to be applied:	The Energy received at the wind farm will be metered and measured by MSEDCL on monthly basis at the sending end sub-station of the Wind Farm.
Frequency of monitoring/recording:	Continuous monitoring and Monthly recording
Value monitored:	377.035
Monitoring equipment:	The Energy Meters of accuracy class 0.2s has been used to measure the electricity imported (at substation) and same is being apportioned by MSEDCL to calculate electricity imported by the project activity. Refer section 3.3 for more details.
QA/QC procedures to be applied:	Every month these meter readings are jointly recorded by MSEDCL representative and plant personnel. The meters at the sub station are the two-way meters and are in the custody of MSEDCL. Since the readings are taken at the point of supply of power to the grid, the transmission and distribution losses and the minimum reactive power consumption has already been taken into account. Refer section 3.3 for more details.
Calculation method:	Described in Section 3.3
Any comment:	Not Applicable

Data Unit / Parameter:	EG _{y, net}
Data unit:	MWh (Mega-watt hour)
Description:	Net electricity supplied to the grid by the Project.
Source of data:	Calculated from EG _{export} and EG _{import} as (EG _{export} – EG _{import})
Description of measurement methods and procedures to be applied:	Net electricity supplied to the grid will be calculated by the values of Electricity import and Electricity export. The Net electricity is recorded as following: (Net Electricity = Net Export – Net Import) The procedures for metering and meter reading will be as per the provisions of the wheeling and banking arrangement.
Frequency of monitoring/recording:	Monthly
Value monitored:	255474.55
Monitoring equipment:	The Energy Meters of accuracy class 0.2s has been used to measure the electricity exported and imported to grid.

QA/QC procedures to be applied:	QA/QC procedures will be implemented pursuant to PPA agreement.
Calculation method:	Explained in Section 3.3
Any comment:	Not Applicable

3.3 Description of the Monitoring Plan

Approved monitoring methodology ACM0002 / Version 10 Sectoral Scope: 1, "Consolidated methodology for grid-connected electricity generation from renewable sources", by CDM - Meth Panel is proposed to be used to monitor the emission reductions.

The monitoring includes collection, monitoring, recording, reporting and archiving of data. The applied methodology requires monitoring of net electricity supplied to the grid. The values of grid emission factors are fixed ex-ante and remain same throughout the crediting period.

a) Purpose of monitoring: The main purpose of the monitoring is to check the electricity exported to the NEWNE grid from the project under consideration.

b) Types of data and information to be reported, including units of measurement: $EG_{y, net}$ (Net electricity supplied to the grid by the Project)

c) Origin of the data: Electricity supplied by the project activity to the grid as per energy generation certificates given by Maharashtra State Electricity Distribution Co. Ltd (MSEDCL)

d) Monitoring, modelling, measurement or calculation approaches:

➤ Measurement or Calculation Approaches:

- The generated electricity is measured through a two step procedure wherein the first metering is carried out at the controller of the machine with on-board meter. The monitoring of all these wind turbines is done from a common monitoring station as a part of central monitoring system. The system consists of a state- of- the- art controlling and monitoring and well trained staff personnel of O&M contractor, Enercon India Limited, are always present on site to monitor various parameters of power generation and deal with any problems related to generation, transmission or maintenance. $EG_{gross, y}$ is the electricity generated from an individual wind turbine measured through its panel meter. The summation of total Electricity exported and imported from wind turbine of the project proponent from individual meters (panel meter) in MWh is presented as

$$\sum EG_{gross\ export, y} \text{ and } \sum EG_{gross\ import, y}$$

and the summation of total Electricity exported and imported (panel data) from the other wind turbines attached to the common MSEDCL meter at the sub-station in MWh is presented as

$$\sum EG_{total\ import} \text{ and } \sum EG_{total\ export}$$

A ratio based on these two set of measured values would be used for apportioning the net electricity supplied to the NEWNE grid by the project activity. The second metering is carried out at grid interconnection point (sub station) wherein the Joint Meter Reading (JMR) is carried out on last day of every month in presence of the representatives of the project proponent & the state electricity utility (MSEDCL). This JMR is used for calculation of the amount of electricity supplied to the grid against which the utility makes the payment to the project proponent. The JMR gives both the "export" ($EG_{JMR, export}$) and "import" ($EG_{JMR, import}$) of the electricity to/ from the NEWNE grid. There is a single meter which gives both the export and import values, this metered reading would give value net of line losses and auxiliary

consumption. Further, as there is a common MSEDCL joint meter for multiple project proponents, the joint meter reading (JMR) is taken every month by MSEDCL personnel reflects the cumulative monthly generation for all wind turbines connected to this MSEDCL meter. The apportioning of electricity generated from the various wind turbines is done by MSEDCL, based on the power generation from the individual wind turbines connected to this MSEDCL meter. O&M personnel from EIL prepare a monthly report on generation and consumption. This report contains details of power exported/imported to/from the grid by each of the wind turbines connected. This apportioned value is then used by the project proponent to raise invoice from MSEDCL.

In current monitoring period EG_{Gross} parameter is not considered similar to last verifications¹, because now the credit breakup is used as source for taking the values of EG_{export} & EG_{import} , the credit breakup is issued on monthly basis & is authorized by MSEDCL.

There is no requirement of apportioning of EG_{export} & EG_{import} to be done by PP, as it is done by MSEDCL & a credit breakup is issued.

The values of EG_{export} & EG_{import} are available in the Credit Breakup given by MSEDCL, so from the breakup sheet the values are sourced & the net electricity supplied to grid has been calculated as the difference between Electricity Exported & Electricity Imported.

$EG_{y, net}$, the net electricity supplied to the grid by the project activity, is calculated as follows:

$$EG_y = EG_{export} - EG_{import}$$

The meters located at the grid sub-station are sealed, maintained and calibrated by the state electricity utility. The meters are tested and maintained as per the Metering Code for Maharashtra. Additionally, each wind turbine is equipped with an integrated electronic meter. The electricity generated is recorded 24 hours.


The procedures for metering and meter reading will be as per the provisions of the power purchase agreement signed between PPs and MSEDCL.

e) Monitoring times and periods, considering the needs of intended users: The Net electricity supplied to the grid is recorded monthly by taking a Joint Meter Reading (JMR) in the presence of officials from off-taking Utility (MSEDCL) and Enercon as O&M contractor, on behalf of project sponsor. The Joint meter reading contains the value of energy imported and exported and the net export to the grid during the recording period. This Joint meter reading is certified by the Executive engineer of utility and by Enercon Officials.


f) Monitoring roles and responsibilities: The sole parameter for monitoring is the electricity supplied to the grid. The Project is operated and managed by Enercon (India) Ltd. The electricity data collection diagram is as follows:

¹ A deviation was sought in this regard and same was approved. Please refer to last verification report of project activity at following weblink:

<https://vcsprojectdatabase2.apx.com/myModule/Interactive.asp?Tab=Projects&a=2&i=489&lat=17.554167&lon=73.924444&bp=1>)

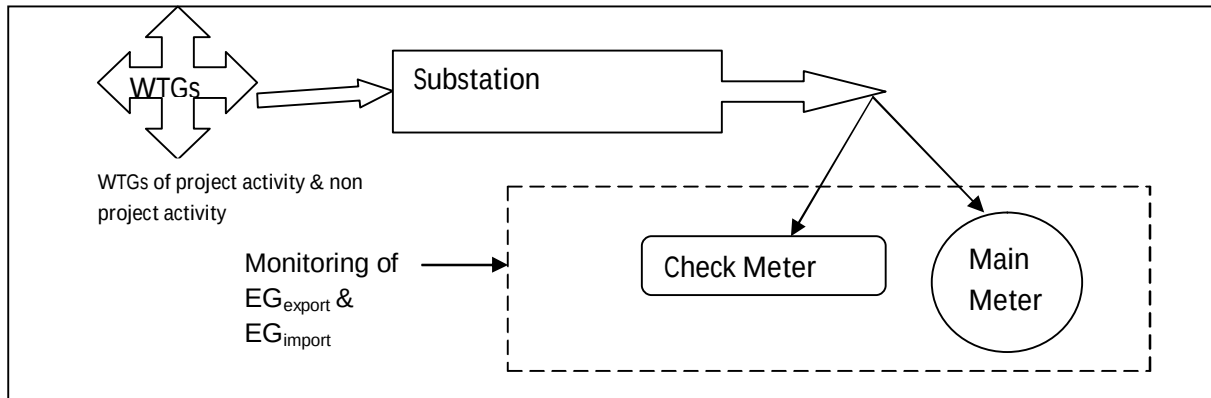

The operational and management structure implemented by Enercon is as follows:

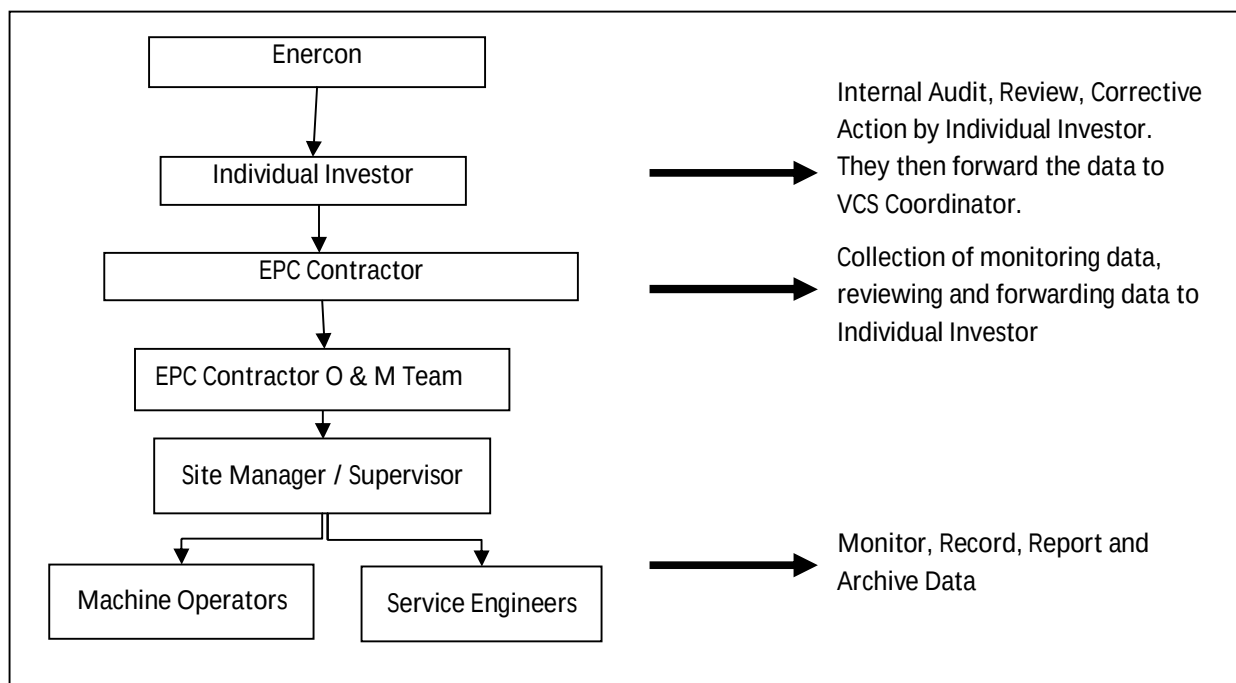

Enercon India limited is an ISO 9001:2008 certified Quality Management system from Germanischer Lloyd. Enercon India limited follows the documentation practices to ensure the reliability and availability of the data for all the activities as required from the identification of the site, wind resource assessment, logistics, finance, construction, commissioning and operation of the wind power project. Adhering to the calibration and testing procedure as described in Power Purchase Agreement ensures the accuracy of monitoring parameter. The project adheres to all the mandatory regulatory and statutory requirements at the state as well as national level.

g) Managing Data Quality:

Data management is as per the ISO certification standards.


1. The data collection is ongoing process. The Net electricity supplied to the grid is recorded monthly by taking a Joint Meter Reading (JMR) in the presence of officials from MSEDCL and Enercon as O&M contractor, on behalf of project sponsor. This Joint meter reading is certified by the Executive engineer of utility and by Enercon Officials.
2. Two-way meter will be calibrated on annual basis and as per the requirement stipulated by SEB. Project Head would be responsible for regular calibration of the meter. Regular calibration of meters ensures the accuracy of amount of electricity supplied to the grid.
3. SCADA system connected to individual WECs ensures continuous online monitoring of all WTGs.
4. The net electricity supplied by individual customer's WTGs as mentioned in Credit Breakup given by MSEDCL can be cross-checked with invoices raised by customers to the MSEDCL.

h) Annual maintenance and major breakdown detail:-

Description of maintenance intervals: On project site there is a schedule for annual maintenance for the entire machine. There are four types of maintenance and machine has to stop for defined time period for maintenance as follows:

- 1) Visual maintenance: average 3 to 4 hr stop of WEC
- 2) Grease maintenance: average 3 to 4 hr stop of WEC
- 3) Electrical maintenance: average 16 to 20 hr stop of WEC
- 4) Mechanical maintenance: average 16 to 20 hr stop of WEC

Cycle for annual maintenance is according to following picture:

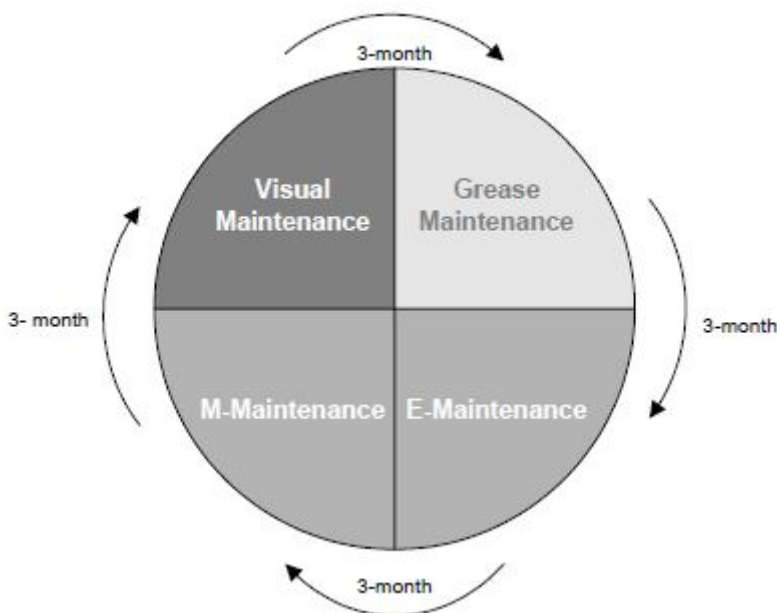

Annual Maintenance cycle

Maintenance comprises not only activities to determine and assess a wind turbine's actual state but also those to keep the system's nominal state. Repair work necessary to reconstruct the nominal state are not, however, part of these maintenance instructions.

The details of the calibration are mentioned in the table 4 below:

Table 4: Meters calibration detail

Sr · No	Customer Name	District	Loc No.	Capacity	Date of Commissioning	Feeder details	Meter Serial Number (Main Meter)	Accuracy Class	Make	Calibration Dates	
										Recent	Due on
1	G. B. Rubber Products	Satara	1	1.6	14-Feb-06	F-3	04760188	0.2	Elster	3-May-12	2-May-13
2	G. B. Rubber Products	Satara	2		14-Feb-06	F-3	04760188	0.2	Elster	3-May-12	2-May-13
3	Shah Lulla Estate Developers	Satara	4	0.8	14-Feb-06	F-3	04760188	0.2	Elster	3-May-12	2-May-13
4	Liberty Oil Mills Ltd.	Satara	6	2.4	7-Feb-06	F-3	04760188	0.2	Elster	3-May-12	2-May-13
5	Liberty Oil Mills Ltd.	Satara	7		7-Feb-06	F-3	04760188	0.2	Elster	3-May-12	2-May-13
6	Liberty Oil Mills Ltd.	Satara	8		7-Feb-06	F-3	04760188	0.2	Elster	3-May-12	2-May-13
7	Liberty Oil Mills Ltd.	Satara	1	1.6	8-Feb-06	F-1	04760189	0.2	Elster	5-May-12	4-May-13
8	Liberty Oil Mills Ltd.	Satara	2		8-Feb-06	F-1	04760189	0.2	Elster	5-May-12	4-May-13
9	Paceman Sales Promotion P. Ltd.	Sangli	36	0.8	22-Mar-06	F-1	04862746	0.2	Elster	27-Aug-12	26-Aug-13
10	Delta Enterprises	Sangli	37	1.6	22-Mar-06	F-1	04862746	0.2	Elster	27-Aug-12	26-Aug-13
11	Delta Enterprises	Sangli	38		15-Jun-06	F-1	04862746	0.2	Elster	27-Aug-12	26-Aug-13
12	Delta Enterprises	Sangli	19	0.8	15-Jun-06	F-1	04862746	0.2	Elster	27-Aug-12	26-Aug-13
13	Mahanagar Developers	Sangli	53	4.8	5-Jan-07	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13
14	Mahanagar Developers	Sangli	54		6-Mar-07	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13
15	Mahanagar	Sangli	55		5-Jan-07	F-3	04862	0.2	Elster	27-Aug-12	26-Aug-13

	Developers						747				
16	Mahanagar Developers	Sangli	56		5-Jan-07	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13
17	Mahanagar Developers	Sangli	57		5-Jan-07	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13
18	Mahanagar Developers	Sangli	61		5-Jan-07	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13
19	Mahanagar Developers	Sangli	62		6-Mar-07	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13
20	Mahanagar Developers	Sangli	63	2.4	5-Jan-07	F-1	04862746	0.2	Elster	27-Aug-12	26-Aug-13
21	Mahanagar Developers	Sangli	60		6-Mar-07	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13
22	Mahanagar Developers	Nasik	30	0.8	28-Feb-07	F-4	04862984	0.2	Elster	20-Jun-12	19-Jun-13
23	Kishor Food Products P. Ltd.	Sangli	47	0.8	10-Dec-08	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13
24	Mr. J. P. Patel	Nasik	95	0.8	29-Mar-07	F-6	04862987	0.2	Elster	20-Jun-12	19-Jun-13
25	Mr. C. P. Patel	Nasik	84	0.8	31-Mar-07	F-6	04862987	0.2	Elster	20-Jun-12	19-Jun-13
26	Mr. V. V. Patel	Nasik	80	0.8	31-Mar-07	F-6	04862987	0.2	Elster	20-Jun-12	19-Jun-13
27	Mr. J. V. Patel	Nasik	83	0.8	29-Mar-07	F-6	04862987	0.2	Elster	20-Jun-12	19-Jun-13
28	Mr. S. V. Patel	Nasik	94	0.8	29-Mar-07	F-6	04862987	0.2	Elster	20-Jun-12	19-Jun-13
29	Mr. V. L. Patel	Nasik	76	0.8	29-Mar-07	F-6	04862987	0.2	Elster	20-Jun-12	19-Jun-13
30	Laxmi Narayan Best Chiwda	Nasik	81	0.8	29-Mar-07	F-6	04862987	0.2	Elster	20-Jun-12	19-Jun-13
31	New Sahyadri Industries Ltd.	Ahmednagar	74	1.6	27-Jan-07	F-5	04862983	0.2	Elster	20-Jun-12	19-Jun-13
32	New Sahyadri Industries Ltd.	Ahmednagar	75		27-Jan-07	F-5	04862983	0.2	Elster	20-Jun-12	19-Jun-13
33	Mr. P. L. Patel	Ahmednagar	45	0.8	6-Feb-07	F-1	04862978	0.2	Elster	20-Jun-12	19-Jun-13
34	Elpro International	Ahmednagar	52	0.8	30-Dec-06	F-1	04862978	0.2	Elster	20-Jun-12	19-Jun-13
35	Prachar Energy	Ahmednagar	31	1.6	3-Mar-07	F-4	04862984	0.2	Elster	20-Jun-12	19-Jun-13
36	Prachar Energy	Ahmednagar	32		3-Mar-07	F-4	04862984	0.2	Elster	20-Jun-12	19-Jun-13
37	Panama Wind Energy Pvt. Ltd./D.J. Malpani	Ahmednagar	47	1.6	30-Dec-06	F-1	04862978	0.2	Elster	20-Jun-12	19-Jun-13
38	Panama Wind Energy Pvt. Ltd./D.J. Malpani	Ahmednagar	48		30-Dec-06	F-1	04862978	0.2	Elster	20-Jun-12	19-Jun-13
39	International Conveyors Ltd.	Ahmednagar	51	0.8	30-Dec-06	F-1	04862978	0.2	Elster	20-Jun-12	19-Jun-13
40	Shreem Capacitors Pvt. Ltd.	Sangli	50	3.2	10-Dec-08	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13
41	Shreem Capacitors Pvt. Ltd.	Sangli	51		10-Dec-08	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13

42	Shreem Capacitors Pvt. Ltd.	Sangli	52		10-Dec-08	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13
43	Shreem Capacitors Pvt. Ltd.	Sangli	58		10-Dec-08	F-3	04862747	0.2	Elster	27-Aug-12	26-Aug-13
44	Metalfab Hightech Private Limited	Ahmednagar	46	0.8	6-Feb-07	F-1	04862978	0.2	Elster	20-Jun-12	19-Jun-13
45	Atlas Tours & Travels Pvt. Ltd.	Satara	5	0.8	7-Feb-06	N/A	04760188	0.2	Elster	3-May-12	2-May-13
46	Om Shanti Wind Farms P. Ltd.	Nasik	82	0.8	31-Mar-07	F-6	04862987	0.2	Elster	20-Jun-12	19-Jun-13
47	Gargi Construction Co. Pvt. Ltd.	Ahmednagar	49	1.6	30-Dec-06	F-1	04862978	0.2	Elster	20-Jun-12	19-Jun-13
48	Gargi Construction Co. Pvt. Ltd.	Ahmednagar	50		30-Dec-06	F-1	04862978	0.2	Elster	20-Jun-12	19-Jun-13
49	Mohite & Mohite	Ahmednagar	59	2.4	30-Dec-06	F-1	04862978	0.2	Elster	20-Jun-12	19-Jun-13
50	Mohite & Mohite	Ahmednagar	60		30-Dec-06	F-1	04862978	0.2	Elster	20-Jun-12	19-Jun-13
51	Mohite & Mohite	Ahmednagar	61		30-Dec-06	F-1	04862978	0.2	Elster	20-Jun-12	19-Jun-13
52	Indiana Engineering Works (Bombay) P. Ltd.	Ahmednagar	33	1.6	3-Mar-07	F-4	04862984	0.2	Elster	20-Jun-12	19-Jun-13
53	Indiana Engineering Works (Bombay) P. Ltd.	Ahmednagar	34		3-Mar-07	F-4	04862984	0.2	Elster	20-Jun-12	19-Jun-13
54	Welpack Industries Ltd.	Ahmednagar	29	0.8	28-Feb-07	F-4	04862984	0.2	Elster	20-Jun-12	19-Jun-13
55	Sunilkumar Ramanlal Shah	Ahmednagar	77	0.8	30-Mar-08	F-6	04862987	0.2	Elster	20-Jun-12	19-Jun-13

- The current monitoring period covers the duration from 1st October 2012 to 30th April 2013 and as can be seen from above table that calibration of meters remain valid for this monitoring period.

4 QUANTIFICATION OF GHG EMISSION REDUCTIONS AND REMOVALS

4.1 Baseline Emissions

The baseline emissions (BE_y in tCO_2) are the product of the baseline emissions factor (EF_y in tCO_2/MWh) and the net electricity supplied by the project activity to the grid (EG_y in MWh)

$$BE_y = EG_{BL,y} * EF_{CO_2,grid,y}$$

BE_y - Baseline Emissions in year y ($t CO_2$)

$EG_{BL,y}$ - Quantity of net electricity supplied to the grid as a result of the implementation of the CDM project activity in year y (MWh)

$EF_{CO_2,grid,y}$ - CO₂ emission factor of the grid in year y (t CO₂/MWh)

$$BE_y = 255474.55 * 0.9058975$$

$$BE_y = 23,140 \text{ (approx.) tCO}_2$$

4.2 Project Emissions

The project involves the operation of a zero-emission wind farm, so

$$PE_y = 0.$$

4.3 Leakage

There is no leakage to this project so $LE_y = 0$.

4.4 Summary of GHG Emission Reductions and Removals

Months	Export (kWh)	Import (kWh)	Net Export (kWh)	VCUs
Oct-12	3729500	7751	3721749	3371
Nov-12	3348117	7428	3340689	3026
Dec-12	4211179	5550	4205629	3809
Oct 2012 to Dec 2012				10206
Jan-13	2652362	7249	2645113	2396
Feb-13	2385413	5328	2380085	2156
Mar-13	4262067	2703	4259364	3858
Apr-13	4996520	1694	4994826	4524
Jan 2013 to Apr 2013				12934

Vintage	VCUs
Oct 2012 to Dec 2012	10206
Jan 2013 to Apr 2013	12934
TOTAL	23140

5 ADDITIONAL INFORMATION

Estimated gross electricity generation from project activity is 77088 MWh/year. The monitoring period covers the duration from 1st October 2012 to 30th April 2013 which is equal to seven months. Thus, estimated gross electricity generation from project activity is calculated proportionally for seven months. This equals to 44968 MWh for current monitoring period. Actual gross electricity generation achieved in monitoring period is 25585 MWh, which is about 43% less than estimation. However, PLF calculation has also been presented with gross electricity generation data and transmission losses² of 5%. PLF achieved in current monitoring period

² http://mercindia.org.in/pdf/Detail_Wind_Energy_Order.pdf

based on this calculation is 12.06³ % against 20 % PLF value in registered PD. Also, actual VCUs generated in a year is compared with estimated VCUs in registered PD. Comparison is provided below. As shown below, actual VCUs are about 4.7% higher than estimated VCUs.

VCU Comparision	
Actual VCUs in a year ⁴	VCUs as estimated in Registered PD
23140+49955=73095	69815

³ The billing cycle at Kadvekhurd site for the month of October-12 was from 17-Sep-2012 to 18-Oct-2012. Last monitoring period for Kadvekhurd site covers the period up to 17-Sep-2012. Current monitoring period for Kadvekhurd site for the month of April-13 is upto 17-Apr-2013. PLF determined covers the monitoring period from 01-October-2012 to 30-April-2013 except the case of Kadvekhurd site as mentioned above.

⁴ It considers the VCUs from May-12 to Sep-12 taken from last monitoring period as 49955